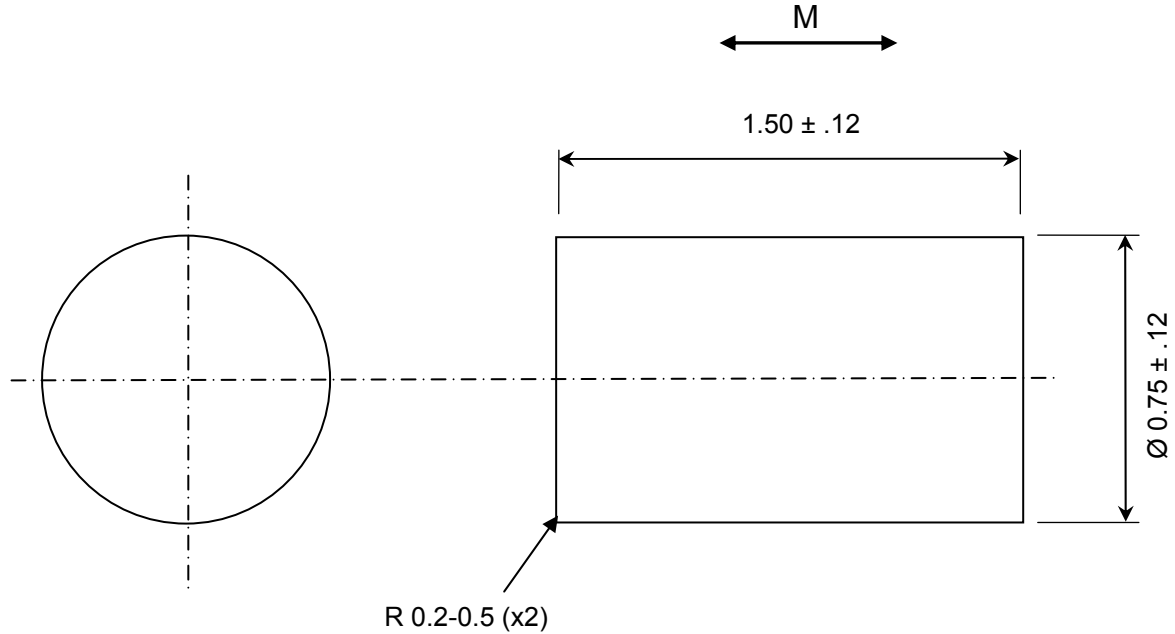



**CONFIDENTIAL & PROPRIETARY INFORMATION**

This document contains Confidential and Proprietary Information of Alliance LLC, and all design, manufacturing, reproduction, use, and sale rights of such information are expressly reserved

ALL DIMENSIONS ARE IN MM

**NOTES:**

- MAGNET PROPERTIES PER N-45SH:  
 Br: 13,200-13,600 G  
 Hc: 12,600-12,900 Oe  
 Hci: ≥20,000 Oe  
 T max: 150 C
- SUPPLIED MAGNETIZED THROUGH THE LENGTH
- PARTS ARE NICKEL PLATED FOR 15hrs SALT SPRAY MIN.



REV	DESCRIPTION	DATE	BY

TOLERANCES (UNLESS OTHERWISE NOTED)	
DECIMAL	METRIC
X.XX = ± .01	X.X = ± .25
X.XXX = ± .005	X.XX = ± .13
ANGLES ± .5°	
DO NOT SCALE DRAWING	

<b>Alliance LLC</b> 1450 CLARK DRIVE, VALPARAISO, INDIANA 46385		
DESCRIPTION: 0.75 mm x 1.5 mm DISC MAGNET		
AMS P/N: AS5000-MA075H		P/N: 07515AMS
GRADE: N-45SH	Drwg by: BT	REV LEVEL: A
COATING: Nickel	Appr by: DV	Appr. Dated: 09-25-2013