
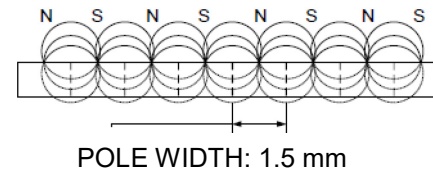
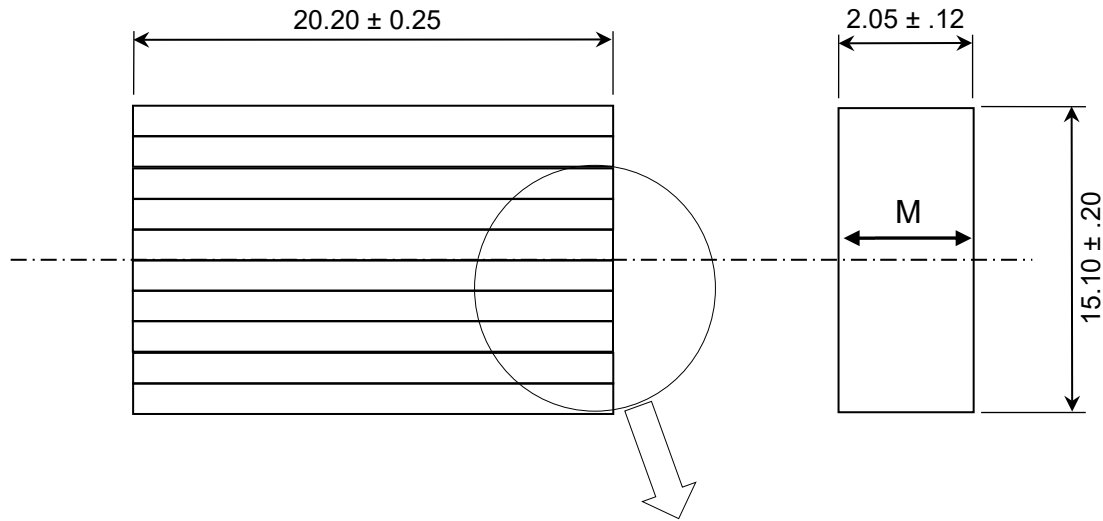


**CONFIDENTIAL & PROPRIETARY INFORMATION**  
 This document contains Confidential and Proprietary Information of Alliance LLC, and all design, manufacturing, reproduction, use, and sale rights of such information are expressly reserved

ALL DIMENSIONS ARE IN MM



**NOTES:**

1. MATERIAL: NITRILE RUBBER FERRITE
2. MAGNET PROPERTIES:  
 Br: 2,300-2,600 G  
 Hc: 2,100-2,300 Oe  
 Hci: 2,400-3,400 Oe  
 T max: 70 C
3. SUPPLIED MAGNETIZED 10 POLES THROUGH THE 2.05 mm THICKNESS

Rev	Description	Dated

**TOLERANCES**  
 (UNLESS OTHERWISE NOTED)

DECIMAL	METRIC
X.XX = ± .01	X.X = ± .25
X.XXX = ± .005	X.XX = ± .13

**ANGLES**  
 ± .5°

DO NOT SCALE DRAWING

<b>Alliance LLC</b>		
1450 CLARK DRIVE, VALPARAISO, INDIANA 46385		
DESCRIPTION: Flexible Ferrite Sensor Magnet		
<b>LINEAR SENSOR MAGNET</b>		<b>P/N: FLX2012</b>
GRADE: NRF-25	Dwg by: BT	REV LEVEL: A
COATING: None	Apr by: DV	Apr. Dated: 03-13-2020